




The Industrial Pure Water System



DIAMONDSKID™ is an

Industrial grade

Reverse Osmosis water purification system. It is currently used throughout the domestic and international marketplace, answering the call for pure, quality, consumable drinking water.

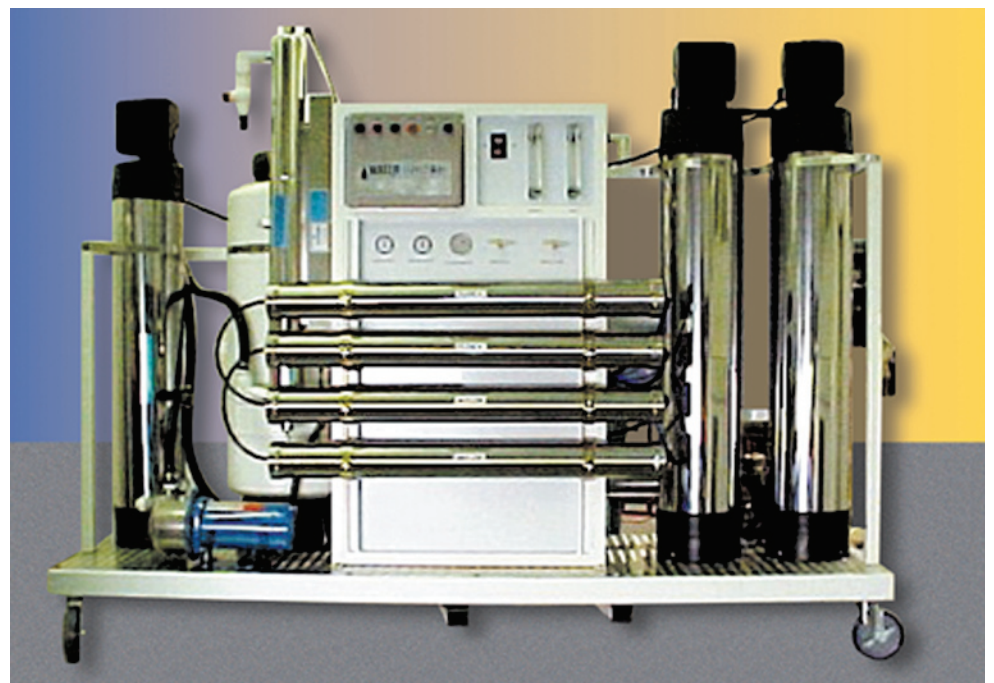

The complete **DIAMONDSKID™** system interfaces with additional compatible units to accommodate your everyday water business needs.

These units provide you with a means to *clean and sterilize* containers efficiently; *fill* a variety of container sizes; and to *dispense and sell* your pure water product 24 hours a day.

Look into these additional offerings:

 **BOTTLERINSE**

 **FILLSTATION**

 **WATERSEAL**

 **WINDOWVEND**



Water Purification Process

STEP 1 AG Pre-Filtration—removes particulate matter down to 20 microns.

STEP 2/3 Maxi-Cure—an activated carbon filter that removes chlorine, chloramine, solvents, lead, insecticides, gasses, and other harmful contaminants. Works as a water softener without the use of salt by drawing hardness particles together and crystallizing them. Includes an automatic backwashing system.

STEP 4 5 Micron Pre-Filter—removes particles, sediment, and algae.

STEP 5 R.O. Pump—high pressure, stainless steel pump to boost water pressure to 160 lbs. for maximum membrane efficiency.

STEP 6 Reverse Osmosis Membrane—water is forced through semipermeable, .0002 micron membrane, allowing only pure water molecules to pass.

STEP 7 Storage—water is stored in FDA approved tanks.

STEP 8 Repressurized System—a 20 G.P.M. pressure pump assures constant water supply from storage tanks to post carbon filter, ultra-violet sterilizer, and faucets.

STEP 9 Pressure Tank—33-gallon pressure tank assures a constant flow of water to the filler and prolongs pump life.

STEP 10 Post-Carbon Filtration—water travels through 1 cubic foot Post Carbon filter with automatic backwash, polishing it for exceptionally smooth taste.

STEP 11 Ultraviolet Sterilizer—25 G.P.M. stainless steel sterilizer eliminates up to 99.9% of all bacteria.

STEP 12-optional—ozone may be added to water storage tanks to prevent future bacterial growth.

WATER BUSINESS INTERNATIONAL

Features

- Powder coated steel frame—Aluminum diamond plate base
- Pre-wired electrical panel—Circuit breaker
- Automatic flush
- LIGHTS—Power on; system running; low pressure with auto cut-off
- Stainless steel booster pump
- Dual level R.O. controls
- Auto-backwash—On pre and post treatment—stainless steel jackets
- Pre and post filter gauges
- Waste and recycle valves
- Product and waste flow meters
- Pressure pump—20 G.P.M.
- Ultraviolet sterilization light—25 G.P.M.
- All components and materials are either NSF/FDA/UL/ETL approved
- Stainless steel membrane housings

OPTIONS

- Ozone generator
- Feed pump
- TDS meter
- Hour meter

Model	Gal./liters per day	Dimensions	Weight
DS-1	1,500/5,625	99L x 30W x 74H	675
DS-2	3,000/11,250	99L x 30W x 74H	700
DS-3	4,500/16,875	99L x 30W x 74H	725
DS-4	6,000/22,500	99L x 30W x 74H	750
DS-5	7,500/28,125	99L x 30W x 74H	775
DS-6	9,000/36,000	99L x 30W x 74H	800

Specifications

- **Feed water:** Temperature: 85°
Pressure: 40-80 psi
Operating pressure: 160 psi
Total Dissolved Solids (TDS): 2000 ppm
- **Tolerance:** Iron: 0.5 ppm
Silica: 25 ppm@50% recovery
pH range: 3-11
- **Water recovery**—up to 60%
- **Salt rejection**—90-98%+